


# High Pressure Equipment & Accessories

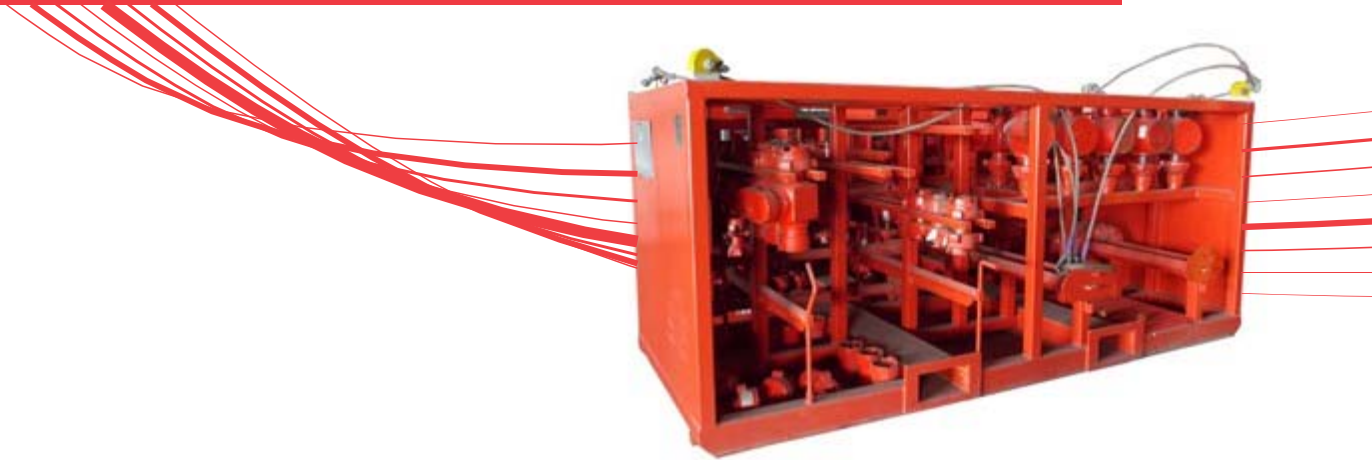

With over 50,000 cargo carrying units circulating the globe, Swire Oilfield Services is the world's largest supplier and continually evolving to meet our customers' needs. Swire Oilfield Services provides the highest quality of pressure iron and other related equipment and accessories.

Our high pressure iron is available for rent in 2" and 3" 1502 pressure iron. All equipment is inspected and tested before each use with inspection and test certifications provided. In addition, Swire Oilfield Services offers full traceability of all equipment with documented and proven refurbishment techniques by trained professionals.

## Equipment & Services

- > Adjustable Relief Valves
- > Adjustable Chokes
- > Plug Valves
- > Loops
- > Swings
- > Straights
- > Integral Spools
- > Integral Tees
- > Mud Guages
- > High Pressure Hoses
- > 5-Valve Dual Adjustable Choke Manifolds
- > Carrying Rack
- > Multiple Crossover Configurations
- > Flange

Contact the sales team for more information.

[www.swireos.com](http://www.swireos.com)

 **SWIRE OILFIELD SERVICES**  
RELIABLY DYNAMIC

# Adjustable Relief Valves



## Technical Specifications

Diameter	Max Working Pressure
2"	1,000 PSI
2"	5,000 PSI
2"	10,000 PSI
2"	15,000 PSI

---

# Adjustable Chokes



## Technical Specifications

Diameter	Max Working Pressure
2"	15,000 PSI

# Plug Valves

## Technical Specifications

Diameter	Length	Max Working Pressure
2"	1"	1,000 PSI
2"	2"	5,000 PSI
2"	3"	10,000 PSI



---

# Integral Spools

## Technical Specifications

Diameter	Length	Max Working Pressure
4' 1/6"	2"	15,000 PSI
4' 1/6"	4"	15,000 PSI
4' 1/6"	6"	15,000 PSI
4' 1/6"	8"	15,000 PSI
4' 1/6"	10"	15,000 PSI
4' 1/6"	12"	15,000 PSI



# Integral Tees



## Technical Specifications

Diameter	Max Working Pressure	Crossover
2"	15,000 PSI	Thread x Thread x Wing
2"	15,000 PSI	Thread x Wing x Thread
3"	15,000 PSI	Wing x Thread x Wing
3"	15,000 PSI	Wing x Thread x Thread

---

# High Pressure Hoses



## Technical Specifications

Diameter	Length	Max Working Pressure
1"	50'	5,000 PSI
1.5"	25'	5,000 PSI
2"	25'	5,000 PSI
2"	50'	5,000 PSI
3"	50'	15,000 PSI