

# Open-Top Containers



SWIRE OILFIELD SERVICES SUPPORT THE WORLD'S LARGEST FLEET OF DNV 2.7-1/EN 12079 CARGO CARRYING UNITS FOR THE OFFSHORE ENERGY MARKET. THIS RANGE OF OPEN-TOP CONTAINERS IS IDEAL FOR THE TRANSPORTATION OF EQUIPMENT THAT REQUIRES LOADING BY CRANE OR FORKLIFT. ADDITIONAL PROTECTION CAN BE PROVIDED BY THE USE OF A ROBUST TARPULIN OR NET FITTED TO THE TOP OF THE CONTAINER AFTER THE LOADING AND SECURING OF THE EQUIPMENT.

DUE TO OUR OPERATIONAL SIZE THESE CONTAINERS ARE GENERALLY AVAILABLE ON VERY SHORT LEAD TIMES AND ARE PROVIDED ON BOTH SHORT-TERM AND LONG-TERM HIRE.

## Key Features

- > Multiple sizes for all standard applications
- > Ex-stock availability for urgent requirements
- > Provided with internal swiveled tiedown points to ensure secure transportation of goods and cargo
- > Cargo nets are available to enhance goods security and stability
- > The units are stackable, reducing lay down area requirements
- > Drainage is designed into the unit to minimise the risk of retained water increasing the gross weight of the lift
- > Optional roof bows, tarpaulins, door reals and nets


All of our operational, support and design activity is built on ISO 9001:2008.

As you would expect, all of the appropriate units come complete with lifting sets, certified to meet DNV 2.7-1/EN 12079

Swire Oilfield Services offers a full range of cargo carrying units. Please see our contact details to obtain further information on containers, baskets, open-top containers, skips, chemical tanks, half heights and modular systems.

Contact the sales team for more information.

# Open-Top Containers

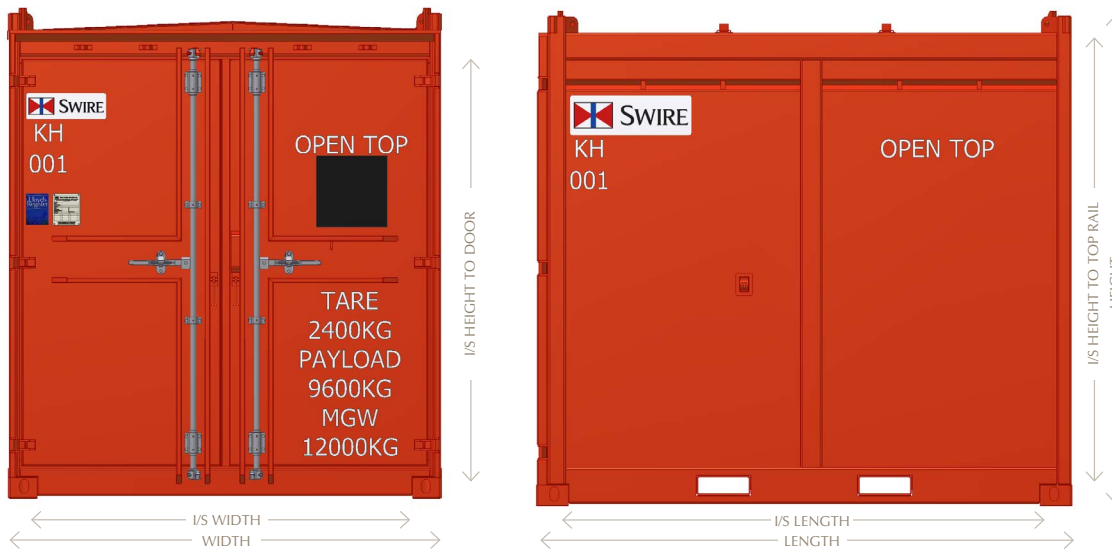

## Dimensions and Weights

CONTAINER TYPE	Length (mm)		Width (mm)			Height (mm)		Tare (kg)	Pay Load	MGW (kg)
	O/A	I/S	O/A	I/S	I/S (to door Aperture)	O/A	I/S (to door/top rail)			
EH	3,658	3,366	2,438	2,126 / 2,326	3,455	2,717	2,230 / 2,380	3,200	10,800	14,000
H	6,058	5,690	2,438	2,128 / 2,268	5,826	2,778	2,130 / 2,420	5,200	14,800	20,000
HA	6,668	6,300	2,743	2,433 / 2,573	6,436	2,778	2,130 / 2,420	5,700	19,300	25,000
KH	2,991	2,671	2,438	2,128 / 2,308	2,770	2,758	2,237 / 2,421	2,400	9,600	12,000
LHA	4,880	4,560	2,438	2,128 / 2,308	2,781	4,669	2,220 / 2,420	3,850	16,150	20,000
MH	7,010	6,550	3,490	3,090 / 3,290	6,767	2,755	2,180 / 2,420	6,600	18,000	24,600
NH	4,267	3,947	2,438	2,128 / 2,308	4,056	2,776	2,219 / 2,419	3,080	12,920	16,000
PH	7,616	7,292	2,438	2,138 / 2,238	7,381	2,800	2,180 / 2,420	6,320	15,860	22,000
TREX	10,060	9,700	3,650	3,250 / 3,450	9,816	2,910	2,210 / 2,500	8,800	20,000	28,800
NHA	4,267	TBC	2,438	2,408	2,324	2,420	2,231	4,000	16,000	20,000

### Norway

Tel: +47 51653800  
Email: norway@swireos.com

### United Kingdom

Tel: +44 1224 872707  
Email: uk@swireos.com

### USA

Tel: +1 281 210 5598  
Email: usa@swireos.com

### Brazil

Tel: +55 22 3737-1050  
Email: brazil@swireos.com

### West Africa

Tel: +234 704 355 0394/5  
Tel: +234 808 663 3065  
Email: westafrica@swireos.com

### Southern Africa

Tel: +244 937 943 824  
Tel: +44 787 647 6282  
Email: southern.africa@swireos.com

### Australasia

Tel: +61 8 6254 4600  
Email: australia@swireos.com

### Middle East

M: +971 (0)55 710 5155  
Email: uae@swireos.com

### South East Asia

Tel: +65 6632 1900  
Email: singapore@swireos.com



RELIABLY DYNAMIC